



PRODUCT DATASHEET

LoRaWAN WATER FLOODING SENSOR

OVERVIEW

NetOP Water Flooding Sensor is a long- range wireless sensor which can be used for detecting water flooding for preventing potential property damage that results from flooding or leaks. This sensor can also be used to detect water leakage. This sensor is compatible with LoRaWAN technology.







PRODUCT DATASHEET

TECHNICAL DRAWING

Box With Terminal Seal

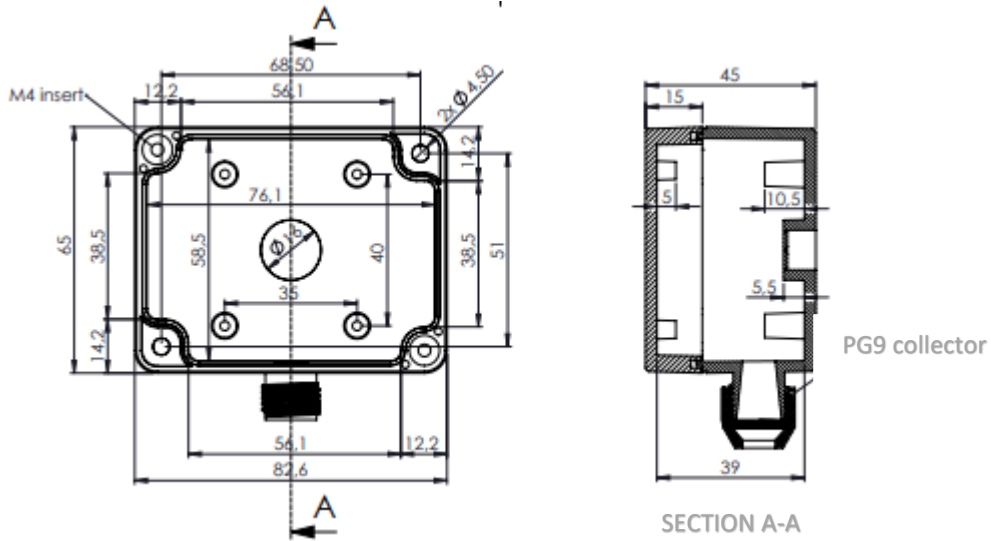

Cover Page

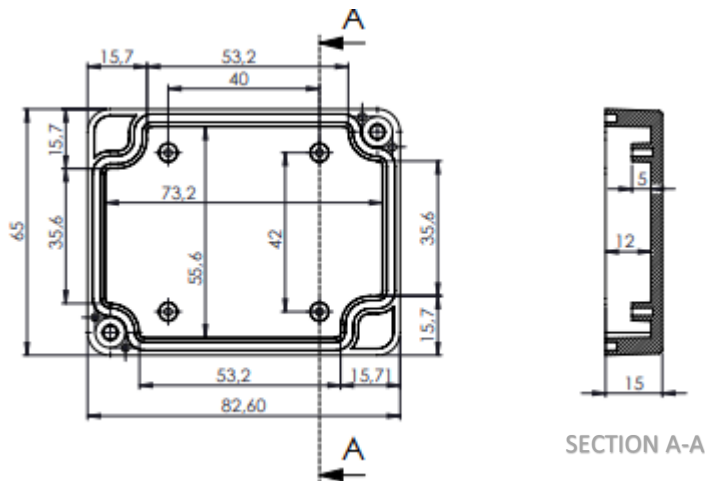



PRODUCT DATASHEET

KEY FEATURES

Real Plug & Play

Easy to mount & install

Compatible with LoRaWAN™ specification

Maintenance free

Secure communication (AES-128)

Ultra -Low Power Consumption

Certificate: LoRaWAN™

COMMUNICATION SPECS

Compatible with LoRaWAN Specification 1.0.3

The sensor uses Low Power Wide Area Network-LPWAN technology (LoRa) for connectivity

Compliant with Low and High Frequencies (AS923, AU915, CN470, CN779, EU433, EU868, IN865, KR920, RU864, US915 MHz ISM bands)

Supports High power and Low power LoRa RF applications: - Up to +22 dBm at US915 and AU915, - Up to +14 dBm elsewhere

Ultra -low power consumption. Excellent long-term stability.

170 dB maximum link budget

Radio Performance: High RX sensitivity down to -148 dBm

Full ADR, OTAA and ABP support

Long range wireless data transmission



PRODUCT DATASHEET

MECHANICS

Housing: ABS (IP65 or higher)

Dimensions: 82.5 x 65 x 45 mm

Operating Temperature: -10°C to 55°C

POWER SUPPLY

AA Battery 3.6 V Li-SOCI2-Saft LS 14500

INDICATORS

Status LED (on board)

WATER FLOODING SENSOR SPECIFICATIONS

Output :1 or 0

Data Transmission Period: Every water presence and absence detection.

CERTIFICATIONS & RELIABILITY

EN 60950-1;2006/A2:2013

ETSI EN 301 489-17 V3.1.1(2017-02)

EN 55032:2015



PRODUCT DATASHEET

LoRaWAN FRAME FORMAT

Standard packet size: 24 Bytes

00-01-02-03-04-05-06-07-08-09-10-11-12-13-14-15-16-17-18-19-20-21-22-23

1 byte: Connection Type(1->LoRaWAN)

INFORMATION

012345678: Device ID

|1|: Indicates the type of connection the device uses.





PRODUCT DATASHEET

LoRaWAN WATER FLOODING SENSOR PROTOCOL

01-24-01-23-12-34-23-45-YY-YY-YY-YY-YY-YY-YY-YY-YY-YY-01-2C-25-01-12-0D-EF

01: Selected Slot (1 byte)

24: Water Flooding Sensor Board ID (1 byte)

01: Water State On (00: Water State Off)

YY-YY: Empty Data (9 bytes)

012C: Sleeping Period 0x012CH -> 300D Seconds (2 bytes)

25: Payload Counter 0x25H -> 37D (1 byte)

01: Sensor Message Type Periodic (02->Sensor Message Type Interrupt) (1 byte)

12: Sensor FW Version (1 byte)

- i. Main Version 1
- ii. Sub Version 2

0DEF: 0x0DEFH -> 3567D -> 3567 mV -> 3.567 V (2 bytes)



PRODUCT DATASHEET

INFORMATION

01: Selected slot

24: This slot determines the sensor type.

01: Indicates water presence of state.

00: Indicates the absence of water

YY-YY: Dummy Data

012C: Sleep interval along 300S.

25: Data is live or not. Each measurement is incremented by degree.

01: When the sensor message 02 comes, it enters the interrupt.

12: Sensor firmware version 1.2

0DEF: Outputs the measurement in Volt (3.567V).
